

Technical Data Sheet KR D 55 Ground Screw Drivers

Basic Info

KR D 55 Ground Screw Driver-L30-F3	KR D 55 Ground Screw Driver-L40-F3
Load torque	
Max. 5,000 Nm	Max. 5,000 Nm
Dimensions	
1.20 m wide x 3.00 m long (incl. mast)	1.20 m wide x 4.00 m long (incl. mast)
Height of mast	
3.75 m (erected)	4.75 m (erected)
Direction of rotation	
Right/left	Right/left
Weight	
1,300 kg	1,400 kg
Item number	
27500	27510
Webkey	
MA2750011D	MA2751011D

The KR D 55 Ground Screw Driver is designed for easy insertion into soil class VII (difficult rock) within minutes in combination with appropriate pre-drilling equipment. The powerful, self-turning KR D 55 Ground Screw Driver is suited to medium to large-scale projects. It easily drives in ground screws up to 2 m in length.



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable

Technical Data Sheet KR B 40-B1 Ground Screw Driver

Basic Info

KR B 40-B1 Ground Screw Driver

Load torque

Max. 5,000 Nm

Direction of rotation

Right/left

Weight

240 kg


Item number

27501

Webkey

MA2750111D

The KR B 40 Ground Screw Driver is designed for easy insertion into soil class VII (difficult rock) within minutes in combination with appropriate pre-drilling equipment. The machine is to be mounted on a carrier machine (excavator) of 1.5 t to 3.0 t deadweight, in compliance with the tipping load chart of the excavator. The excavator-mounted machine is equipped with a Lehnhoff 01/03 quick coupling. Please inquire about compatibility with other models.

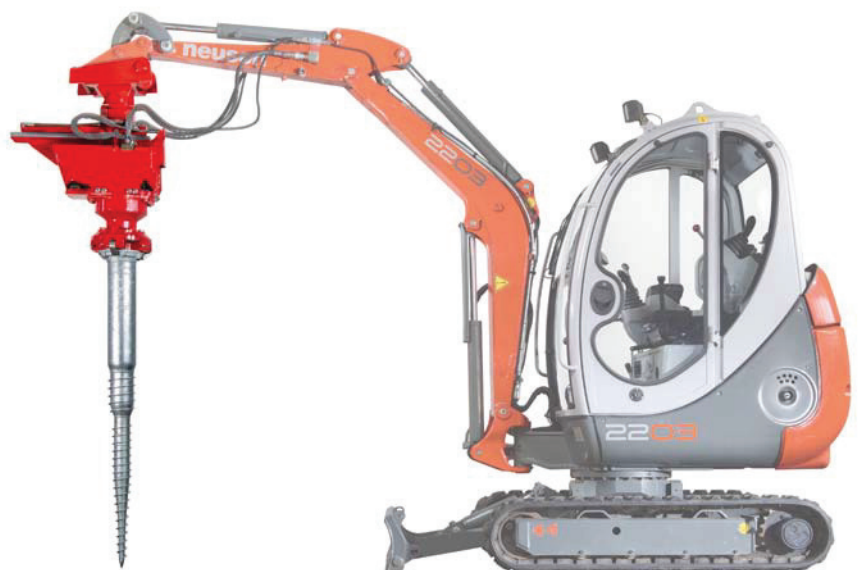

Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable

Technical Data Sheet KR B 60-B1 Ground Screw Driver

Basic Info

KR B 60-B1 Ground Screw Driver

Load torque

Max. 10,000 Nm

Direction of rotation

Right/left

Weight

330 kg

Item number

27502

Webkey

MA2750211D

The KR B 60 Ground Screw Driver is designed for easy insertion into soil class VII (difficult rock) within minutes in combination with appropriate pre-drilling equipment. The machine is to be mounted on a carrier machine (excavator) of 5.0 t to 12.0 t deadweight, in compliance with the tipping load chart of the excavator. The excavator-mounted machine is equipped with a Lehnhoff 08 quick coupling. Please inquire about compatibility with other models.



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable

Technical Data Sheet KR B 250 Ground Screw Drivers

Basic Info

KR B 250 Ground Screw Driver-B1

Load torque

Max. 30,000 Nm

Direction of rotation

Right/left

Weight

500 kg

Item number

27503

Webkey

MA2750311D

The KR B 250 Ground Screw Driver is designed for easy insertion into soil class VII (difficult rock) within minutes in combination with appropriate predrilling equipment. The machine is to be mounted on a carrier machine (excavator) of 8.0 t to 16.0 t deadweight, in compliance with the tipping load chart of the excavator. The excavator-mounted machine is equipped with a Lehnhoff 10 quick coupling. Please inquire about compatibility with other models.



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable